

Sample Final

Question 1 (50 points)

Multiple Choice – 10 questions, 5 points each

1. When fluid flow is characterized as fully turbulent, which of the following is a true statement?

- Friction factor decreases with increasing Reynolds Number
- Friction factor increases with increasing Reynolds Number
- Friction factor is independent of Reynolds Number
- Friction factor is independent of relative roughness

2. A thin rectangular plate has width w and height h . We want to calculate the drag D , which we assume is a function of width (w), height (h), kinematic viscosity (ν), fluid density (ρ) and flow velocity (V). How many independent dimensionless Pi groups can we form?

- 1 2 3 4 5 6

3. The flow rate of water at room temperature in a pipe of 1 cm diameter is $0.1 \text{ m}^3/\text{s}$. The flow is

- Laminar Transitional Turbulent

4. A model pipe is scaled down in diameter tenfold. Water is to be used in both. Dynamic similarity requires that the Reynolds number be the same in each. The velocity in the model should be

- The same as the prototype 10 times greater than prototype
100 times greater than prototype 10 times smaller than prototype
100 times smaller than prototype

5. When studying flow in a pipe

- Major Losses are always greater than Minor Losses
- Minor Losses depend very sensitively on the pipe roughness
- Major Losses are reduced by decreasing pipe wall roughness
- Bernoulli's equation is always valid

6. A jet with velocity V exiting from a pipe with diameter D causes a horizontal force, F , on a wall perpendicular to the jet. If the exiting velocity were to halve to $0.5V$ with the same pipe, the new force on the wall would be

$F/8$ $F/4$ $F/2^{1/2}$ F $2^{1/2}F$ $2F$ $4F$ $8F$


7. A flow is incompressible and three-dimensional. The components in the x and y directions are $u=3x$, $v=7y$. What of the following is a correct value of w

$-10z+3x^2$ $10z$ $3z$ $7z$ $4z$ $21z$

8. A dam has a water depth of h which produces a hydrostatic force F on the dam face. If the water depth doubles to $2h$, the hydrostatic force on the dam face will then be

$[F/4]$ $[F/2]$ $[F/2^{1/2}]$
 $[F]$ $[F \cdot 2^{1/2}]$ $[2F]$ $[4F]$

9. The figure shows the relationship between shear stress and velocity gradient for two fluids, A and B. Based on this figure, which of the following is definitely true?



- Absolute viscosity of A is greater than that of B
- Absolute viscosity of B is greater than that of A
- Kinematic viscosity of A is greater than that of B
- Kinematic viscosity of B is greater than that of A


10. Which of these is true

- Streamlines and streaklines are the same for any incompressible flow
- Pathlines and streamlines are the same for any incompressible flow
- Streamlines and streaklines are the same for any steady flow
- Pathlines and streamlines are the same for any fully developed flow

Question 2 (25 points)


Water flowing under an obstacle is shown in the figure. The flow exerts a vertical force on the object, which is assumed to be a function of flow rate, density of water, acceleration of gravity, and the length of the object. A 1/20 scale model is to be used to predict the vertical force on the prototype

- (a) Perform a dimensional analysis of the problem
- (b) If the prototype flow rate is $100 \text{ m}^3/\text{s}$ determine the flow rate for the model for the flows to be similar
- (c) If the model force is $F=100\text{N}$, predict the corresponding force on the prototype

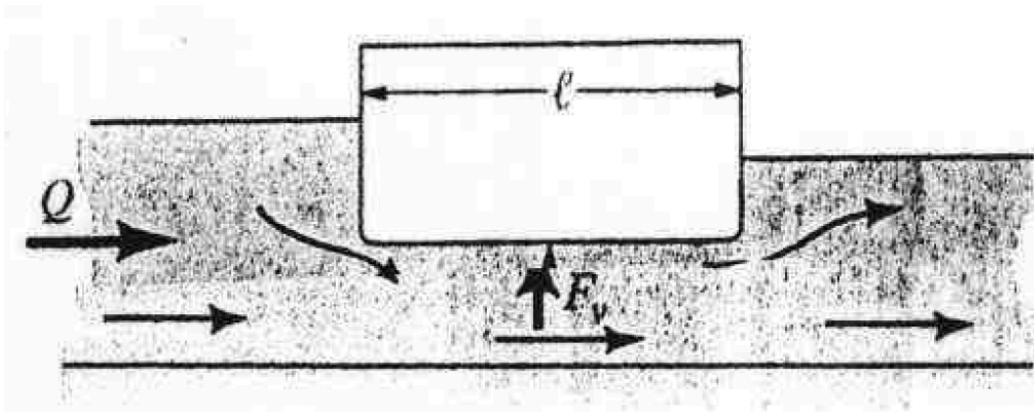

Question 3 (25 points)


Water flows from the tank shown in the figure and the water depth of the tank in meters is given by h . The total length of the pipe is 7 meters and has diameter 2cm with a friction factor of 0.03. The loss coefficients for the entrance are 0.5, each elbow 1.5 and 10 for the valve. Calculate the flow rate when $h=0.5\text{m}$. If the tank has a cross section area of 1m^2 , what is the rate at which the water depth decreases in the tank (i.e. the velocity of the interface – if you ignored it, is it reasonable to ignore)?

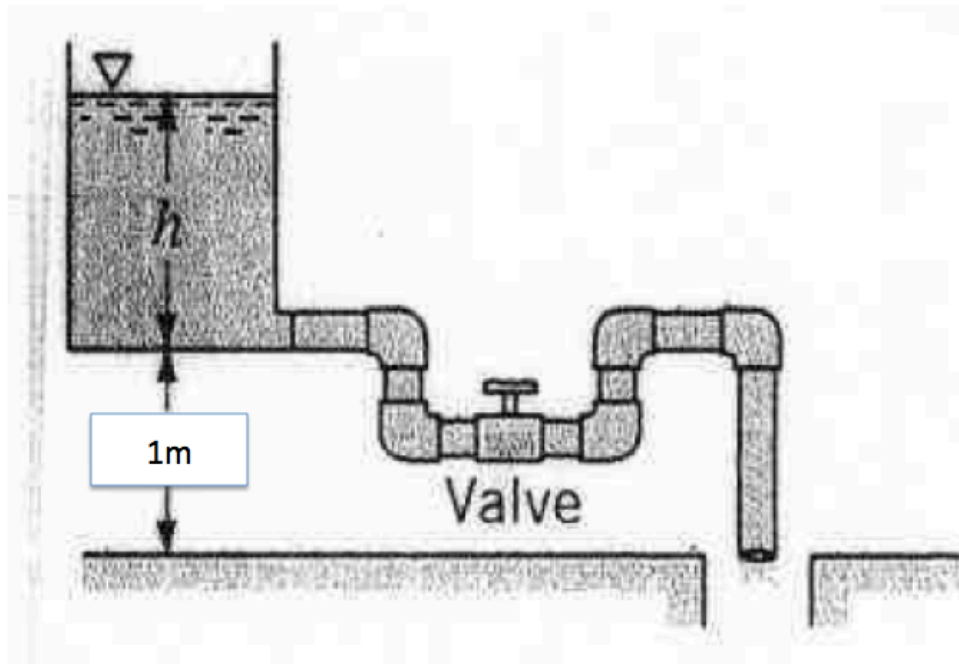

Question 4 (25 points)

Assuming frictionless, incompressible 1-d flow of water through the horizontal tee as shown in the figure, estimate the x and y component of the force exerted by the tee on the water. Each pipe has a diameter of 1m.

As the flow is incompressible and frictionless you may use Bernoulli's equation to help you.

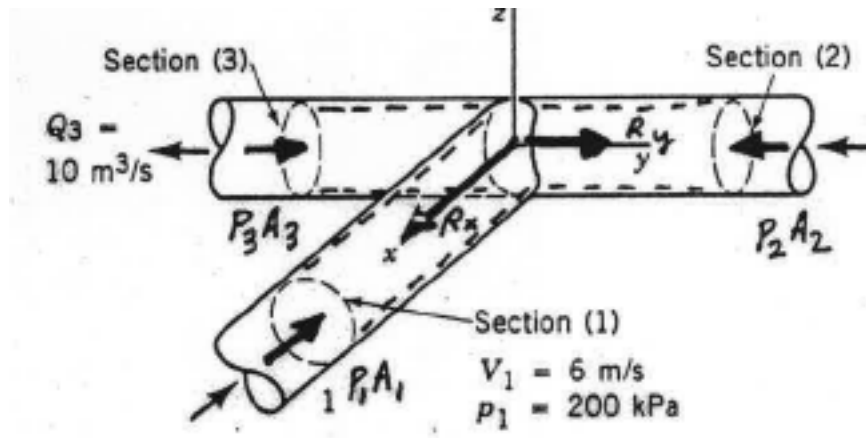

Question 5 (25 points)

At a water treatment facility, a rectangular membrane of a certain width lies along the sloping boundary as depicted. The force on the membrane is not to exceed 100 kN. If the fluid in the reservoir is water, what is the maximum allowable width of the membrane? If the fluid were a very salty brine (SG=1.2) as may be used for desalination what would it be? A reinforced bar is to be placed across the membrane at the depth of the effective hydrostatic force. Where will this be? (i.e. what is the distance marked with ?? in the figure)

